




# why! Replacing W670SZQ1 keyboard

Written By: Felice Suglia

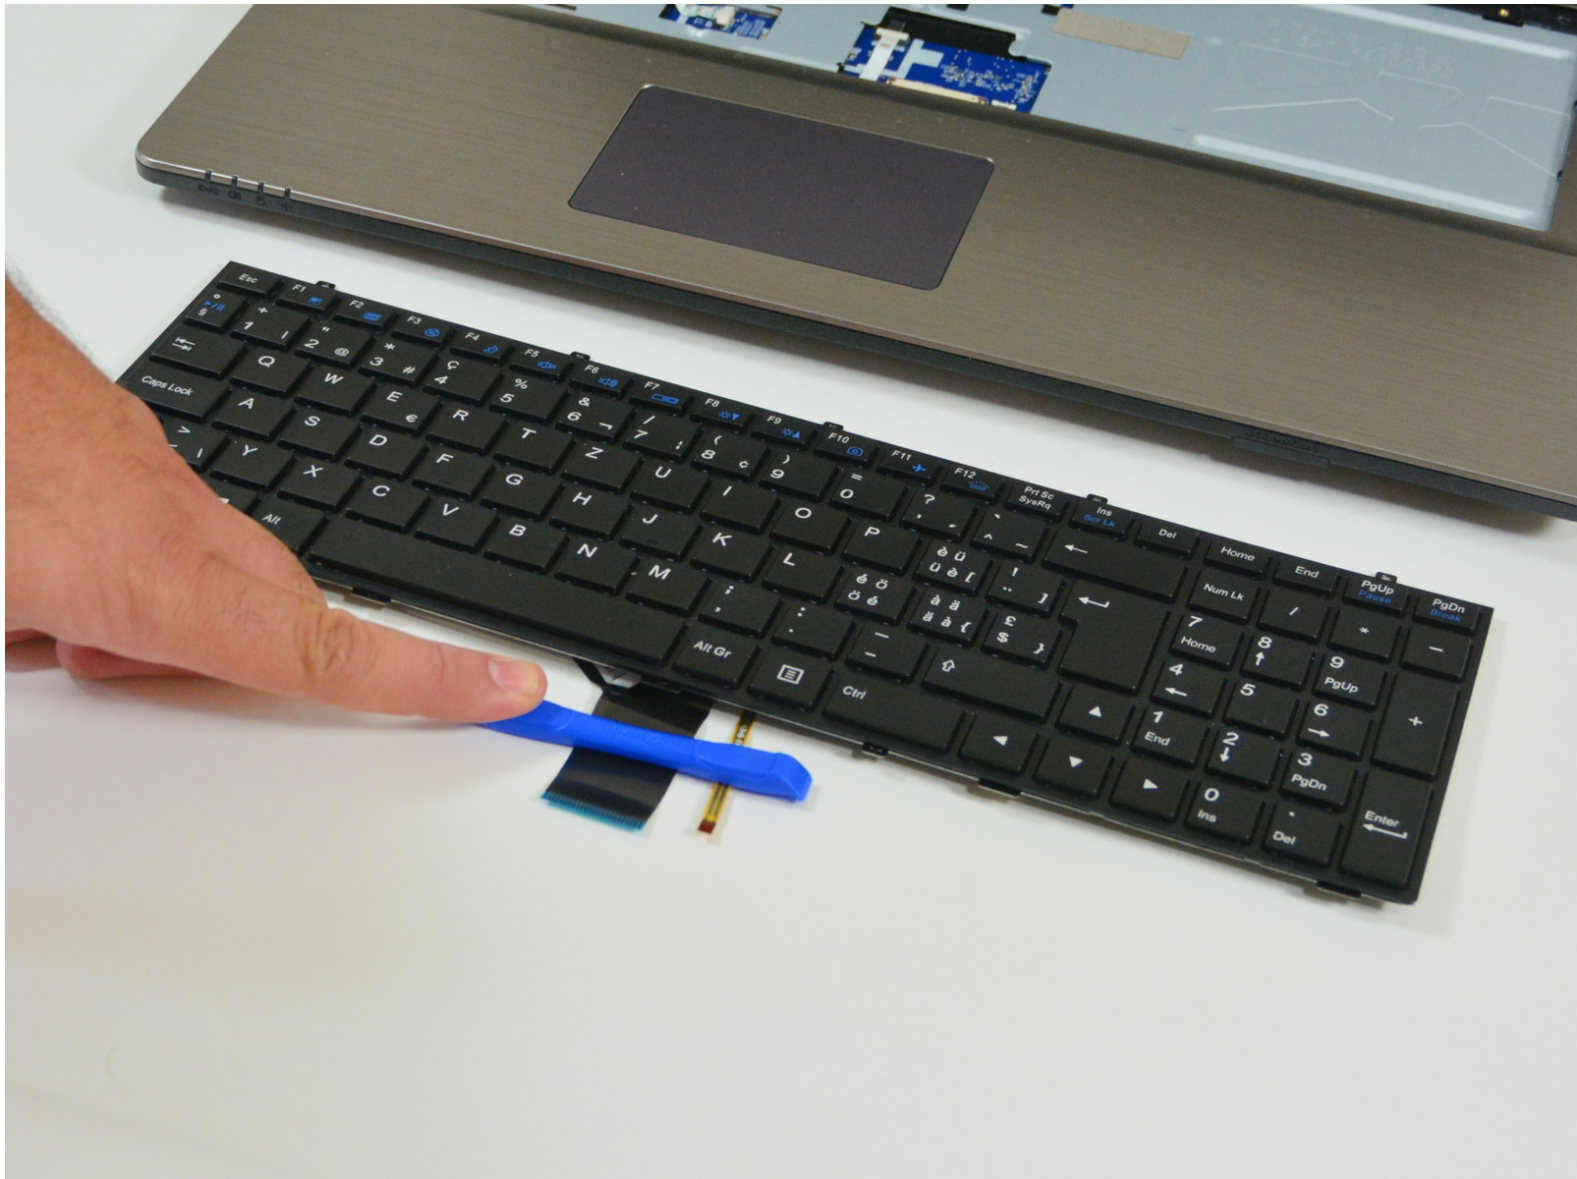


## Step 1 — accumulator



- Open the latch of the battery on the left side.
- Open the latch of the battery on the right side.
- Remove the battery where you simultaneously holding open the right bolt.


## Step 2 — Access to major components

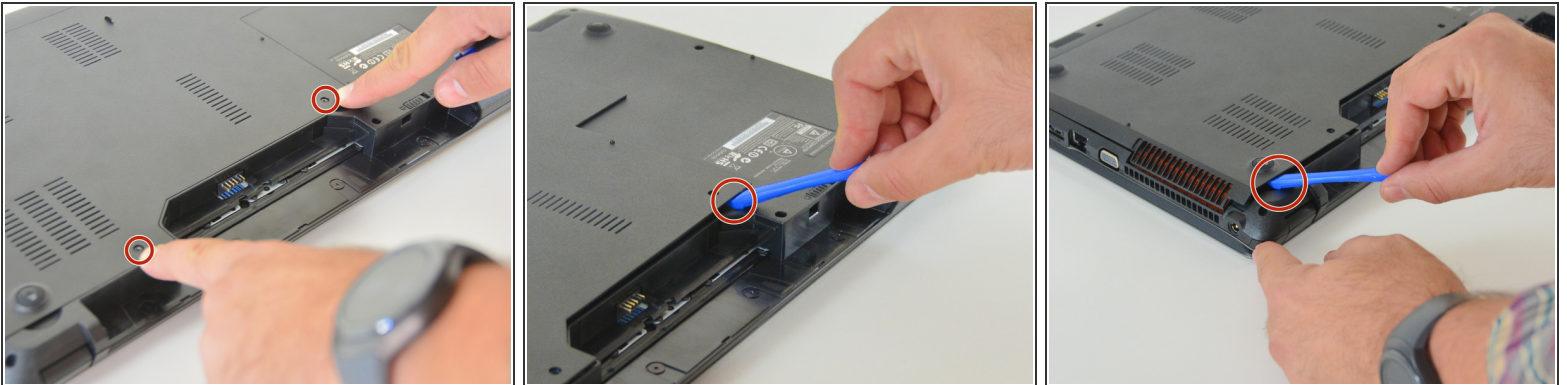

- Remove the Philips screwdriver to remove the two screws at the bottom of the cover.
- Lift the cover at the bottom right with the iFixit Opening Tool
- Lift the cover on the bottom left with the iFixit Opening Tool
- Finally, remove the cover so that the access to the main components is free.



## Step 3 — keyboard

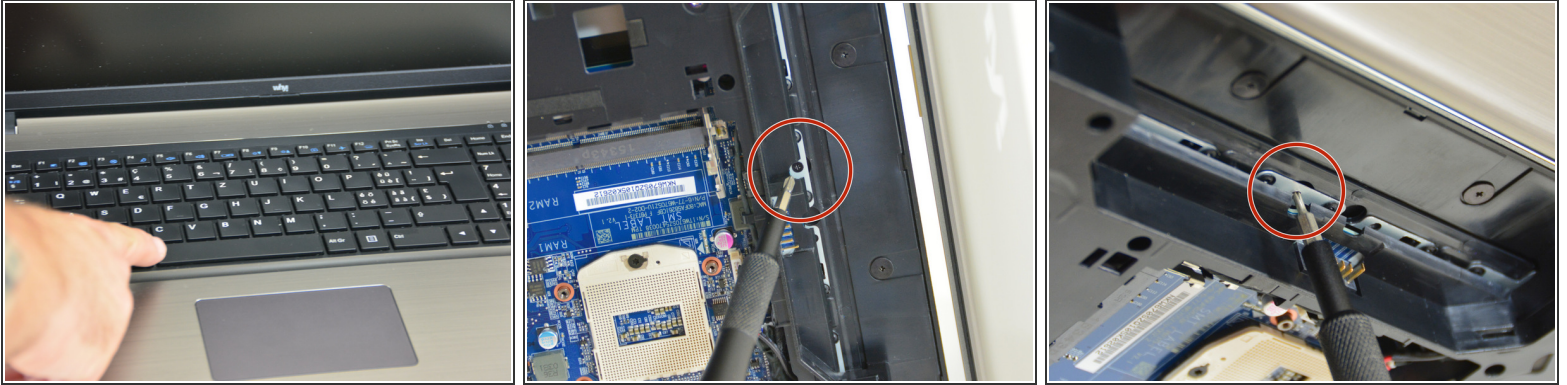


- Once the bottom cover is removed you can begin to dismantle the keyboard.
- Go first to the computer and then unscrew the screw as in Figure 2 of this step.
- Then you entclipsen the keyboard screws Cover strip.

## Step 4




- After the cover tape has been removed, you can see the tip of the screwdriver.
- Places Now the five screws securing the keyboard.
- Solve these five screws.

## Step 5

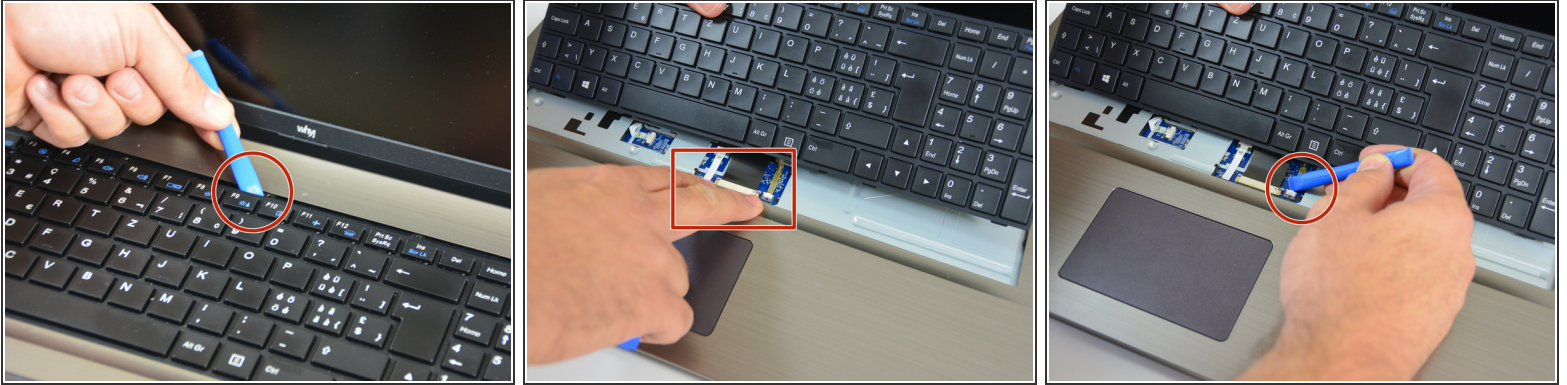

- Now lift the keyboard slightly and pull it back slightly.
- The cables are now visible.
- Loosen the right latch on the plug of the keyboard illumination cable.

## Step 6

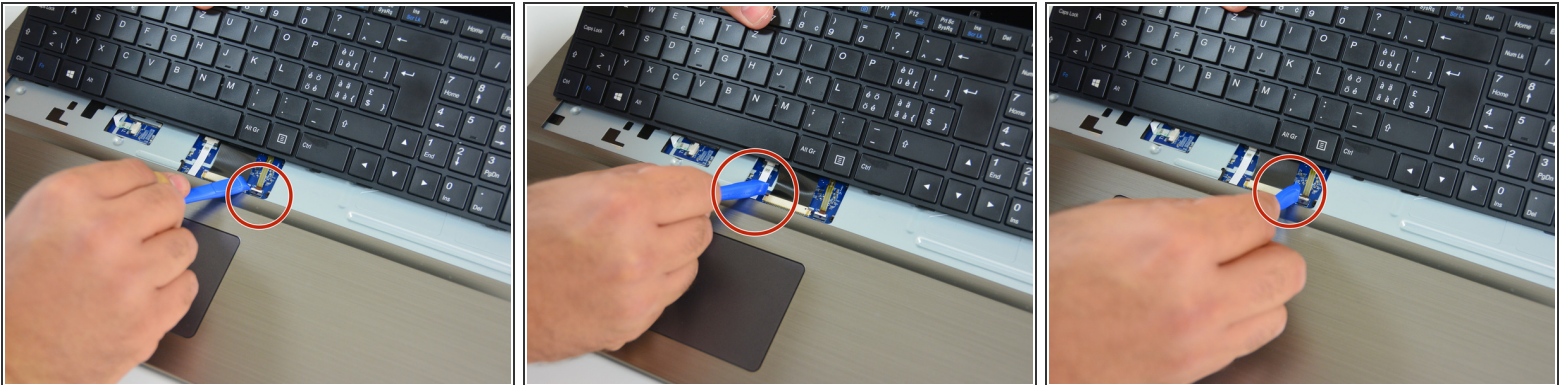

- Thereafter, the left lock.
- Now apply the same procedure to the plug of the main cable (left lock)
- Rights lock.



## Step 7



- You can now remove the keyboard from its slot.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

This document was last generated on 2017-08-09 10:49:35 PM.